

MSL-FN-xxx-AOM

HIGH FREQUENCY MODULATED SINGLE LONGITUDINAL MODE LASER


High frequency modulated laser system has such characteristics as quick modulation rate, high extinction ratio, easy coding and convenient use. Laser modulation frequency of this laser system can be up to 1MHz, It is mainly used in such fields as laser text-image processing, laser lithography, laser Phototypesetting, and laser digital communication. It is suitable for OEM system integration and scientific research laboratories etc..



SPECIFICATIONS

Wavelength (nm)	473±1	532±1	556±1	561±1	671±1
Output power (mW)	>1,10,20,...,50	>100,150,...,200	>1,10,20,...,50	>1,10,20,...,50	>1,10,20,...,150
Transverse mode	Near TEM ₀₀				
Longitudinal mode	Single				
Power Stability (rms,over 4 hours)	<1%,<3%,<5%				
Warm-up Time (minutes)	<10				
M ² factor	<1.5				
Beam divergence, full angle (mrad)	<1.5				
Beam Diameter at the aperture 1/e ² (mm)	~3.0				
Optical Noise (rms,1~20MHz)	<0.5%				
Spectral linewidth (nm)	<0.00001				
Beam height from base plate (mm)	24.8				
Coherent length (m)	>50				
Pointing stability after warm-up (mrad)	<0.05				
Polarization ratio	> 100:1				
Power supply (90-264VAC)	PSU-H-FDA-AOM				
Modulation	>1MHz				
Operating temperature(°C)	10~35				
Expected lifetime (hours)	10000				
Warranty	1 year				

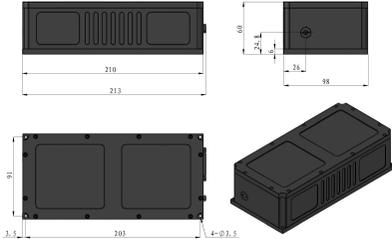

MxL-FN-xxx-AOM	Dimension	PSU-H-FDA-AOM	Dimension
 <p>213(L)×98(W)×60(H) mm³,1.9kg</p>		 <p>269 (L) ×181(W) ×104(H) mm³, 2.7 kg</p>	